

Date: _____ Project: _____
Prepared for: _____ Type: _____
Comments: _____

WALL PACK 2

CLASS I LUMINAIRE | IP66






SPECIFICATIONS

- Class I Luminaire
- IP66 - Suitable for Wet Locations
- Robust Die-Cast Aluminium Casing
- Shatter Resistant Poly-Carbonate Lens
- Colour Rendering Index: >75
- Functioning Temperature: -40°C to 50°C

AVAILABILITY

- 120-277VAC / 347V
- 40W / 60W / 65W / 120W
- 5000K

This is a STOCK item:
Look for our Same Day Shipping icon for all products that ship out on the same day (orders must be placed before 3pm EST)

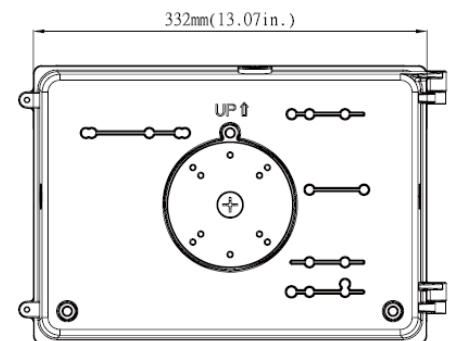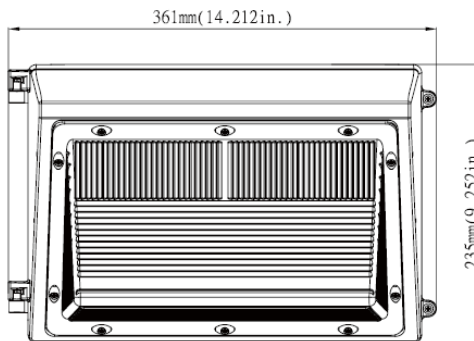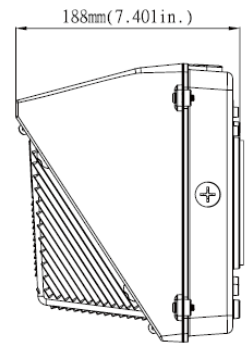

ORDERING INFORMATION

SERIES	INPUT VOLTAGE	POWER (WATTS)	EQUIVALENT TO (WATTS)	LUMENS	COLOUR	MODEL NUMBER
WALL PACK 2	120-277VAC	40	100	4800	5000K	WP2-40W-50K-V3
		60	250	7200	5000K	WP2-60W-50K-V3
		120	400	14400	5000K	WP2-120W-50K-V3
	347V	65	250	7900	5000K	WP2-65W-50K-V3-347V