

Date:	Project:
Prepared for:	Type:
Comments:	

WALL PACK 11

CLASS II LUMINAIRE | IP66
PHOTOCELL TECHNOLOGY



SPECIFICATIONS





- Class II Luminaire
- IP66 - Suitable for Wet Locations
- 0° to >90° Adjustable Tilt
- Integrated Photocell Technology
- Robust Die-Cast Aluminium Casing
- Classic Tempered Glass Lens
- Colour Rendering Index: >75
- Functioning Temperature: -40°C to 50°C

AVAILABILITY

- 30W / 70W
- 5000K
- 120-277VAC

This is a STOCK item: Look for our Same Day Shipping icon for all products that ship out on the same day (orders must be placed before 3pm EST)

Full ies File Available on Request

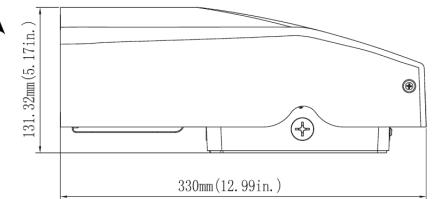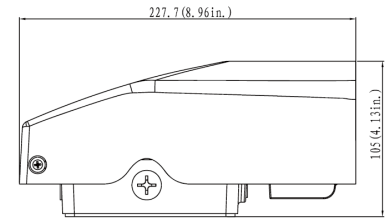

ORDERING INFORMATION

SERIES	POWER (WATTS)	EQUIVALENT TO (WATTS)	LUMENS	LED QTY	COLOR TEMP	MODEL NUMBER
WALL PACK 11	30	100	3000	1	5000K	WP11-30W
	70	250	7800	2	5000K	WP11-70W